

THE SILENT POWER



Low noise level, it is the ideal generator for use in residential areas or outside normal working hours. It's equipped with a reliable gasoline engine, first class components and complete instrumentation.

Standard Equipment

Prewired for remote control (AMF / RSS)	CONN
Differential protection	DPP
Starting system	Electric

Main Features

Frequency	Hz	50
Voltage	V	230
Power factor	$\cos \phi$	0.9
Phase and connection		1

Power Rating

Standby power LTP	kVA	11.9
Standby power LTP	kW	10.7
Continuous power COP	kVA	10.0
Continuous power COP	kW	9.1

Ratings definition (According to standard ISO8528 1:2005)

COP - Continuous Power:

It is defined as being the maximum power which a generating set is capable of delivering continuously for an unlimited number of hours, with the maintenance intervals and procedures being carried out as prescribed by the manufacturers.

LTP - Limited-Time running Power:

It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 h of operation per year (whose no more than 300 for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. No overload capability is available.

Engine Specifications

Brand		Honda
Model		GX630
Engine cooling system		Air
Displacement	cm ³	688
Aspiration		Natural
Speed governor		Mechanical
Operating Speed-Nominal	rpm	3000
Oil capacity	L	1.9
Fuel		Gasoline
Starting system		Electric
Fuel consumption @ 75% PRP	L/h	4.23

Alternator Specifications

Class	H
IP protection	23
Poles	2

Dimensional data

Length	(L) mm	945
Width	(W) mm	595
Height	(H) mm	825
Dry weight	kg	188
Fuel tank capacity	L	24

Autonomy

Running time @ 75% PRP	h	5.67
------------------------	---	------

Noise level

Guaranteed noise level (LWA)	db(A)	89
Noise pressure level @ 7 mt	db(A)	61

GENSET CONTROL PANELS (CONN DPP)

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

COMMANDS

- Start selector switch with key: OFF - ON - START
- **CONN**ector for AMF/RSS (Accessory available)

INSTRUMENTATION (DGT)

- Voltmeter
- Hours-counter
- Frequency meter

PROTECTIONS

- Circuit breaker
- Differential protection (**DPP**)
- Oil Guard

SOCKET TYPE

SCHUKO 230V 16A IP54	1
2P+T CEE 230V 16A IP44	1
2P+T CEE 230V 32A IP44	1

ACCESSORIES CONTROL PANEL**AMF - AUTOMATIC CONTROL PANEL (CONN)**

This accessory permits to control all the functions about a generator. It's built to monitor mono phase or three phase with neutral systems in alternate current; it permits to transfer the user's load on generator when the mains voltage is faulty. Conversely, as soon as AMF system detects the power grid, it stops the generator.

Equipment:

- Control and protection unit (DGT)
- Phase detector
- Contactor with interblock
- Battery charged
- Acoustic alarm
- 8 meters control wiring (with CONNector)
- External start stop capability
- Emergency stop button

Instrumentation (DGT):

- Mains voltage
- Genset voltage
- Frequency meter
- Hour meter

Alarm & Shutdowns:

- Generators voltage out of limits
- Battery Voltage out of limits
- Low oil Pressure
- Fail to start
- External shutdown

**RSS - REMOTE START / STOP (CONN)**

RSS Remote start/stop wireless with CONNector (max Distance 90m)



ACCESSORIES


TRANSPORTATION KIT

- With folding handles



MTS- MANUAL TRANSFER SWITCH

Manual transfer switch 40A (for manual control versions 230V)

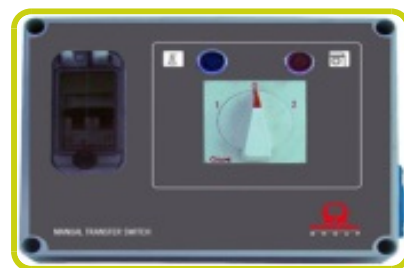

Publishing date: 10/12/13

©2012 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice | ENERGY GENERATION is registered trademarks of PR INDUSTRIAL s.r.l. Other company, product or service names may be trademarks or service marks of others. RevA (06/2012).